

Stainless Steel Cartridge Filter Housing



Industrial filter Cartridge housing for high flow rates and superior filtration.

Filter housings are available in stainless steel for commercial, industrial and small community water filtration applications.

Features and Benefits

- 304 or 316L stainless steel construction for corrosion resistance & durability
- Spring shoulder sealing plates assembly provide a solid fit into the cartridge core to ensure a positive cartridge sealing
- Swing V-clamp for quick easy cartridge to reduce downtime
- Knife edge seal at both cartridge ends to eliminate by-pass
- Adapters for cartridge with cup & post and 222 or 226 optional
- Mounting tabs, legs & custom fittings available by special order
- Liquid Pressure Rating : 150psi (10.3bar) @ 200 F° (93 C°)
- Housing material : 304 or 316L stainless steel
- Inlet/Outlet Connections : 1 inch or 3 inch FNPT, Victaulic and flanges



Optional


- Upstream Vent Port : 1/4 inch NPT
- Drain Port : 1/2 inch FNPT
- Shell O-ring Material : Buna-N , EPDM optional
- Cartridge Length : 10" , 20" , 30" , 40" Filters



HYDRAmate

Housing Components and Dimensions

Model	A (mm)	B (mm)	C (mm)	D (mm)	F (mm)	E (mm)	H (mm)	In/Out	Drain
HDM-W11L3-3"	360	700	1380	300	200	300	440	3"	3/4"
HDM-W11L4-3"	360	900	1620	300	200	300	440	3"	3/4"
HDM-W15L3-3"	380	800	1420	350	200	350	530	3"	3/4"
HDM-W15L4-3"	380	900	1660	350	200	350	530	3"	3/4"
HDM-W19L3-3"	400	800	1460	400	200	400	560	3"	3/4"
HDM-W19L4-3"	400	900	1700	400	200	400	560	3"	3/4"
HDM-W27L3-3"	460	800	1530	450	250	450	630	3"	3/4"
HDM-W27L4-3"	460	1000	1770	450	250	450	630	3"	3/4"

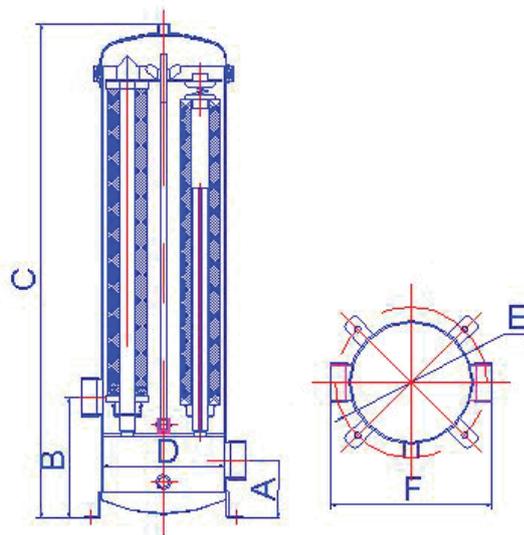

Ordering Information

Reading from left to right, select which specification you require and fill in the box with the code for that option. According to the result, we can provide optimal products to you.

HDM

NO. of
Columns

Cartridge
Length

Connection
Type

W11 = 11 Round

L1 = 10"

3 = 3" FNPT

W15 = 15 Round

L2 = 20"

W20 = 20 Round

L3 = 30"

W27 = 27 Round

L4 = 40"